




#### 主要特征


- 温度范围 : - 40 ... + 250° C  
(参照热电偶电缆使用表)
- 允差: UNI 7937, IEC 751 标准 :  
  - ± 0.15° C a 0° C 对于A等级 (1/2 DIN)
  - ± 0.30° C a 0° C 对于B等级 (1 DIN)
- 0° C 时 PT100
- AISI 303 不锈钢护套
- 调节弹簧螺纹接头  $\varnothing$  8mm, 长 300mm.

#### 产品型号

TR5 B: 卡口固定件

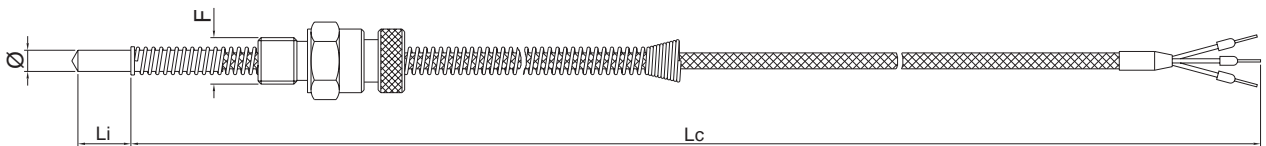

TR5 V: 螺丝固定件

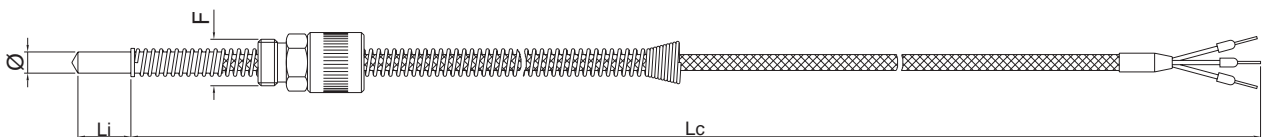

# 订货代码

